



TECHNISCHE SPECIFICATIES



ZOOMLION

CRAWLER SCISSOR LIFTS

ZS0508C/ZS0610C

ZS1216C (WITH OUTTRIGGERS)

Comply with CE Standard



HIGHLIGHTS

High Performance

- ▶ Rubber crawler provides small ground pressure and great obstacle crossing ability
- ▶ Pivot steering with good maneuverability
- ▶ Simple single handle control for steering and walking
- ▶ Work height of 8.8m with high working efficiency (ZS0610C only)

Cost Effectiveness

- ▶ Knuckles lubrication-free and maintenance-free
- ▶ AC motor full lifecycle maintenance-free




FEATURES

Standard Features

Proportional controls	Over tilt protective system
All motion alarm	Hour meter
Fold-down handrails	Extension deck (unidirectional)
Flashing beacon	Charging protection system
Self-closing entry gate	Scissor maintenance prop
Autobrake system	Forklift pockets
Emergency descent system	Load sensing system
Emergency stop button	AC power to platform
On-board diagnostic	Horn

Accessories & Options

- ▶ Platform work lights
- ▶ Air line to platform
- ▶ Overhead protection bar
- ▶ Low-temperature hydraulic oil
- ▶ Synthetic biodegradable hydraulic oil

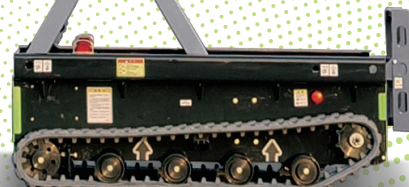

ACCESS WITH ZOOMLION GREEN

Phone: 0086(731)-88353680 0086(731)-88250971
E-mail: awm@zoomlion.com

Add: ZOOMLION Wangcheng Industrial Park, Tengfei Road 997, Changsha, Hunan, China
Web: www.en.zoomlion.com




CRAWLER SCISSOR LIFTS

ZS0508C/ZS0610C

ZS1216C (WITH OUTRIGGERS)

Comply with CE Standard

Model	ZS0508C		ZS0610C		ZS1216C	
	Imperial	Metric	Imperial	Metric	Imperial	Metric
Size						
Work Height	21ft 4in	6.5m	28ft11in	8.80m	45ft3in	13.8m
A Platform Height-Elevated	14ft 9in	4.5m	22ft4in	6.80m	38ft9in	11.8m
B Platform Height-Stowed	3ft 3in	0.99m	3ft 8in	1.12m	5ft4in	1.62m
C Platform Length	4ft 3in	1.29m	6ft4in	1.94m	7ft7in	2.3m
D Platform Width	2ft 4in	0.7m	3ft1in	0.95m	3ft8in	1.12m
Platform Extension	2ft	0.6m	3ft	0.91m	2ft12in	0.91m
E Overall Height (Rails Up)	6ft 11in	2.1m	7ft5in	2.26m	9ft1in	2.76m
Overall Height (Rails Down)	5ft 9in	1.74m	5ft10in	1.77m	7ft4in	2.23m
F Overall Length	4ft 9in	1.46m	6ft11in	2.1m	9ft	2.75m
G Overall Width	2ft 8in	0.81m	3ft5in	1.05m	5ft3in	1.6m
H Ground Clearance	3in	0.07m	4,5in	0,127m	6in	0.15m
Performance						
Platform Capacity	530lb	240kg	550lb	250kg	770lb	350kg
Capacity on Deck Extension	220lb	100kg	250l	113kg	249lb	113kg
Max. Number of Workers	1		2		2 (Indoor) / 1(Outdoor)	
Drive Speed (Stowed)	1.25mph	2km/h	1.25mph	2km/h	1.25mph	2km/h
Drive Speed (Raised)	0mph	0km/h	0mph	0km/h	0mph	0km/h
Turning Radius	0in	0m	0in	0m	0in	0m
Drive Motor	24V/2×0.77kW		24V/2×1.8KW		48V/2×4KW	
Up/Down Time	23s/25s		34s/30s		62s/42s	
Gradeability	25%(14°)		30%(17°)		30%(17°)	
Max. Working Slope (Lateral/Vertical)	1.7°/1.7°		2°/2°		2°/3°	
Drive	Rear Wheels		Rear Wheels		Rear Wheels	
Brake	Rear Wheels		Rear Wheels		Rear Wheels	
Power						
Battery	2×12V91Ah (FULLRIVER) 2×12V/115Ah (QUIMO)		4×6V/220Ah (HOPPECKE) 4×12V/270Ah (QUIMO)		8×6V/170Ah (HOPPECKE) 8×6V/180Ah (QUIMO)	
Charger	24V/30A		24V/30A		48V/35A	
Weight						
Gross	1975lb	895kg	3750lb	1700kg	8270lb	3750kg

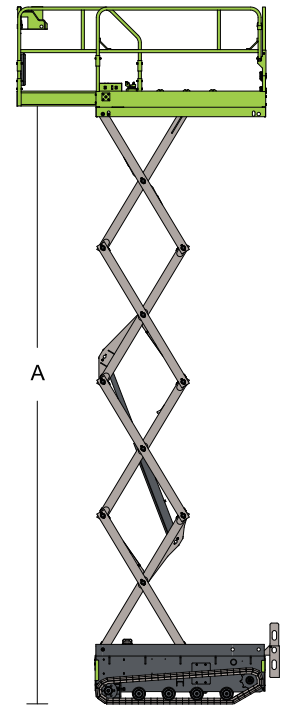



Contact

Verhuur en verkoop: +31 (0)73 888 91 61

Service of storingen: +31 (0)73 760 07 00

E-mail:

Verkoop: verkoop@beekmansheftrucks.nl

Verhuur: verhuur@beekmansheftrucks.nl

Onderhoud/reparatie: service@beekmansheftrucks.nl

Bedrijfsgegevens

KvK nummer te 's-Hertogenbosch: 68613555

BTW nummer: NL857520234B01

Bankrekening: NL40 RABO 0318 1425 54